



## Red Color Flexible LED Strip(60 SMD 3528 leds per meter waterproof IP65)

Item Code: LED Strip-CM-3528R12V60WF65



Mini Order: 1 roll

Average Rating: lb (kg)

[Inquire Now](#)

### Overview

Weatherproof flexible LED light strip with 1-chip 3528SMD LEDs.IP Rating:IP65 .Available in 5 meter (197 in), 1 meter (39 in) and 1/2 meter (19.5 in) lengths. Weatherproof flexible light strips with adhesive backing, can be cut into 3-LED segments. 12VDC operation.


#### Product Feature:

1. 5 meter (197 in)/Roll
2. 3528 SMD LED as light source,super luminous flux,large viewing angle,even lighting,low attenuation.
3. Best cost performance,high color consisence.
4. Energy saving,environment-friendly,long life span 50,000hrs.


#### Application:

Widely used for architectural decorative lighting, amusement park, theater and aircraft cabin mood lighting, hallway and walkway lighting, stairway accent lighting, art lighting for signage letters, cove lighting, emergency exit path lighting, cabinet and under counter lighting, exhibition stands and panels, display cases, etc.

**Product Photos:**

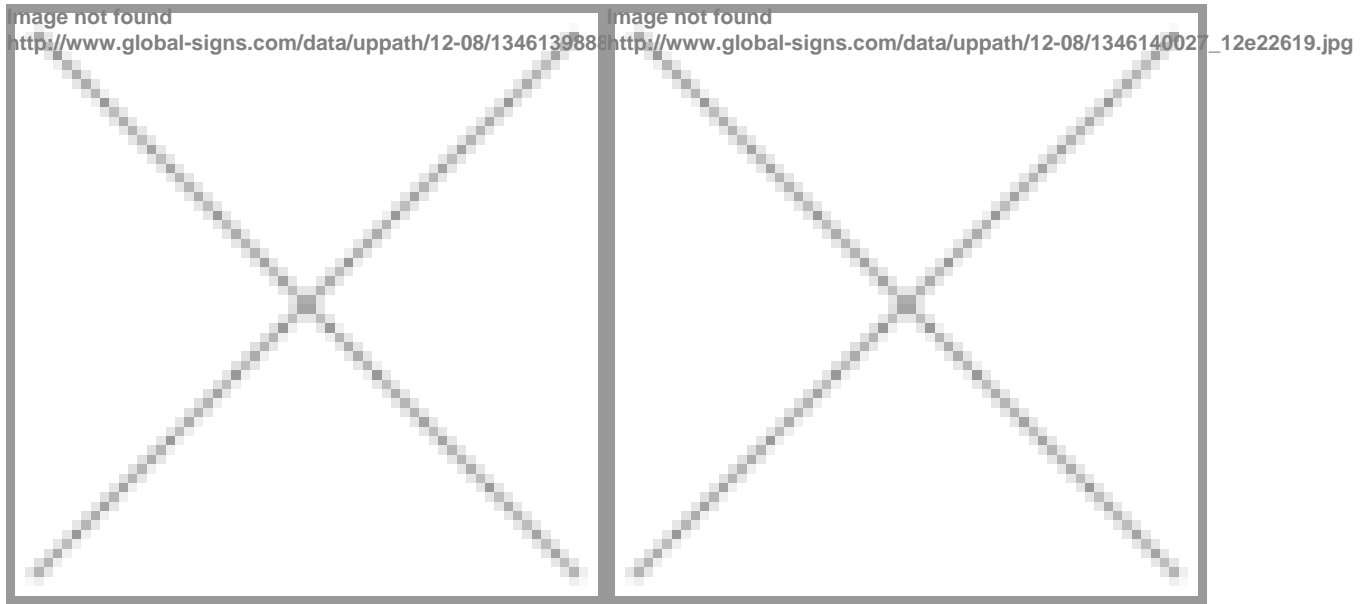


**Three Space Dimensions:**

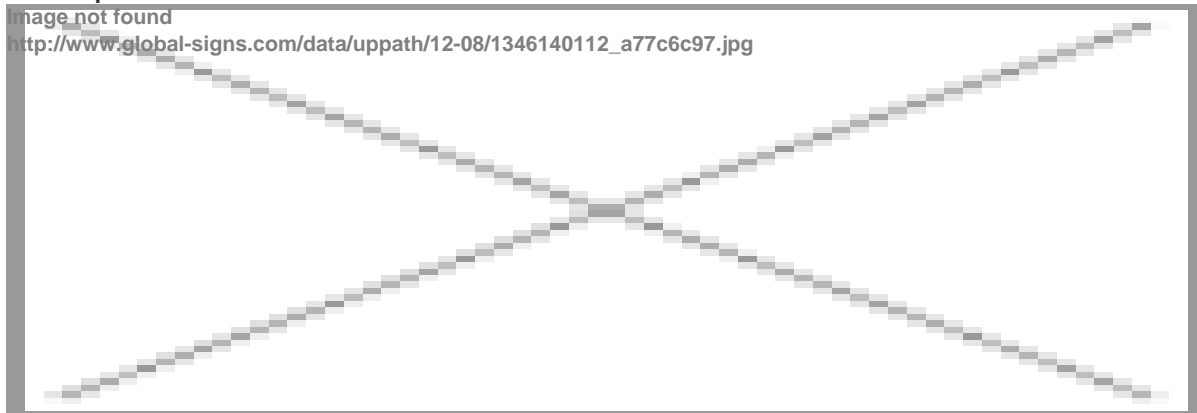

**Applications:**

image not found


[http://www.global-signs.com/data/uppath/12-08/1346140158\\_6cf6eb6c.jpg](http://www.global-signs.com/data/uppath/12-08/1346140158_6cf6eb6c.jpg)

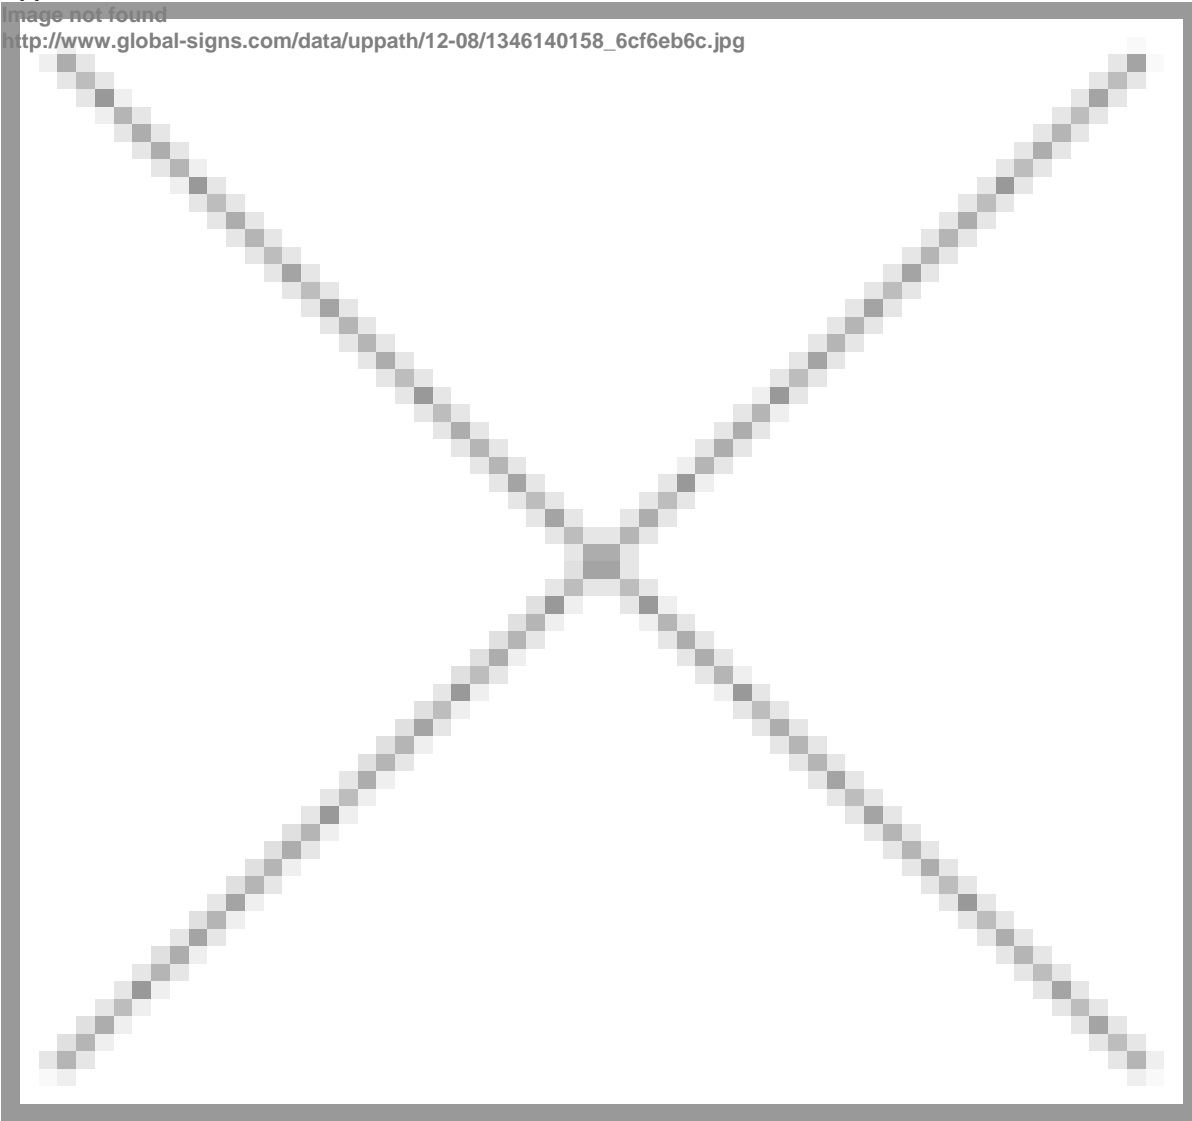

**Connection Diagram (mm):**


image not found

[http://www.global-signs.com/data/uppath/12-08/1346140274\\_c8cbbb3d.jpg](http://www.global-signs.com/data/uppath/12-08/1346140274_c8cbbb3d.jpg)

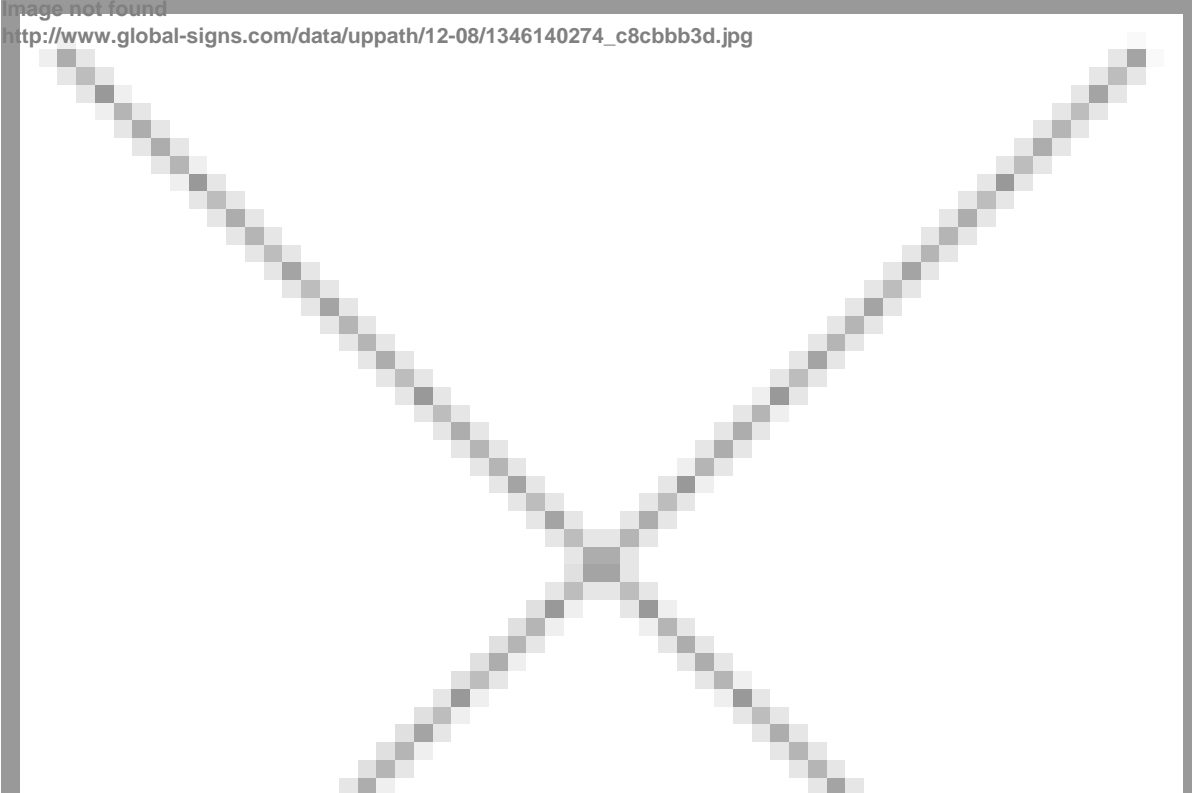

**Notes:**

1. The thickness of the wires shall be adopted based on the possible current products power, length of the wire extension(5meter at maximum as recommended) and the loss in the wires transit at low voltage.
2. The both ends of extension shall be sealed with as waterproof.
3. Don't work under the situations of touching in static-electronics environments or light on.
4. The strip can be connected to 5m at maximum and no exceed.
5. Suggest choosing high-qualified switch power( have shortelectronics ,overvoltage and overloading protection function etc).
6. Acid silicone glue is forbidden.

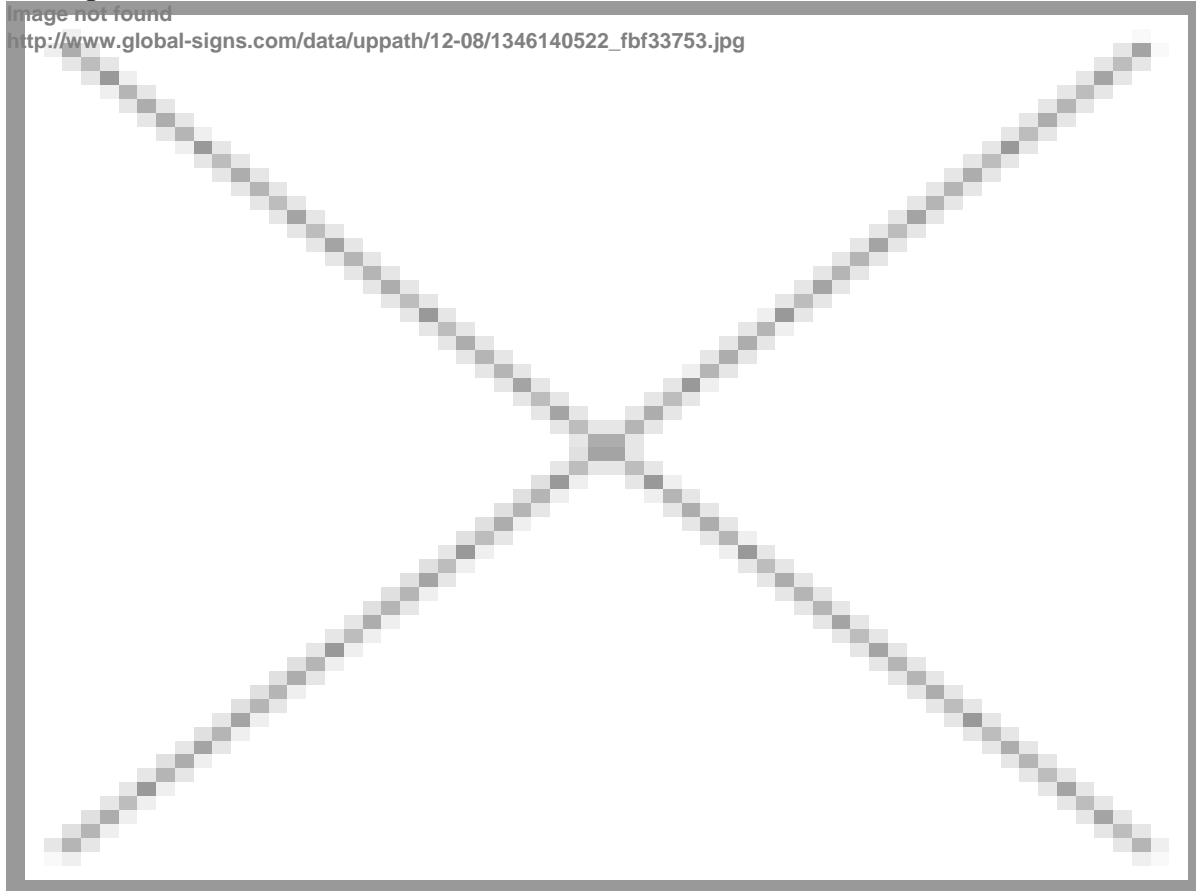**Packing:****Packing detail:**

1. Outer carton:45x25x25.6cm ; inner carton:23x21.6x22.6cm ; Aluminium-Foil bag:220x240x0.12mm.
2. 300pcs LEDs per/5m,5m per reel,one reel in one aluminum -foil bag.
3. 20 bags in one inner carton . ( 100m for one inner carton).
4. One outer carton contains two inner cartons . ( 200m in one outer carton).
5. N.W: 3.4± 10?Kg/outer carton.
6. G.W: 5.2± 15?Kg/outer carton.

**Specifications**

Angle(°)	Color	Luminous(lm)	Wavelength Scope (nm/K)	Working Voltage(V)	Power(W)	Life Sp	
?120	Red	60-108lm	620-630nm	DC12V	24W	50000h	
?120	Green	228-270lm	520-530nm	DC12V	24W	50000h	
?120	Blue	54-72lm	465-475nm	DC12V	24W	50000h	
?120	Yellow	66-90lm	588-595nm	DC12V	24W	50000h	
?120	White	330-420lm	5500-6500K	DC12V	24W	50000h	
?120	Warm White	330-420lm	2800-3200K	DC12V	24W	50000h	
?120	Cool White	330-420lm	8000-10000K	DC12V	24W	50000h	
Others							
LED No.	Cascade QTY	IP degree	FPC width/color	Driving Type	Installation	Working temp.	Stor
300pcs	5m	IP65	8mm/white	constant voltage	20mm,3M double-sided adhesive	-40? —+50?	-40? —

Wires	length150mm,20AWG line Red&Black wires, Red=positive wire, Black=negative wire
-------	--

**Tags**

[Flexible LED Strip\(60 SMD 3528 leds per meter waterproof IP65\)](#)



Copyright © 1999-2012 by Beijing ChinaSigns Information Company Limited All Rights Reserved.

Email:info@sign-in-china.com Tel:+86 132 6410 3286 www.sign-in-china.com